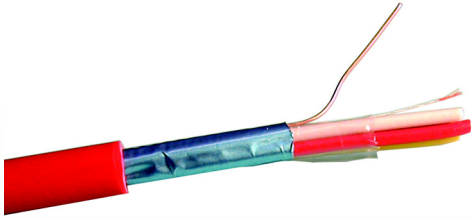


J-Y(St)Y BMK

ALARM CABLES
VDE STANDARD

**DESCRIPTION:**

Alarm system cables; rigid copper conductors PVC insulated. Twisted to reunited braces, wrapped by aluminium/ polyester tape with drain wire. External sheath is in PVC.

STANDARD:
VDE 0815

Core colors: DIN 0815
Conduittore: Rigid Red copper wires
0,8mm: 100 nF/km
Insulation: PVC, VDE 0207 T.2
Screen: Duplex tape + drain wire
Sheath: PVC, VDE 0207 T.
Red

Working Voltage: 300 V
Test Voltage: 800 V
Working temperature: -30°C , +70 °C
-5°C , +50°C (mobile)
Bending radius: 10 x external diameter.

CODE	FORMATION	EXTERNAL DIAMETER	COPPER WEIGHT	WEIGHT
		mm	Kg/km	Kg/km
6T7101609	1 x 2 x 0.8	6	11	40
6T7101709	2 x 2 x 0.8	7	21	60
6T7101809	3 x 2 x 0.8	8.5	31	80
6T7101909	4 x 2 x 0.8	9	41	100
6T7102009	5 x 2 x 0.8	9.5	52	120
6T7102109	6 x 2 x 0.8	10.5	62	140
6T7103109	8 x 2 x 0.8	11.5	82	170
6T7102209	10 x 2 x 0.8	13	102	220
6T7102309	12 x 2 x 0.8	14	123	250
6T7102409	16 x 2 x 0.8	15.5	164	320
6T7102509	20 x 2 x 0.8	16.5	204	380